




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>A61B 5/14, 10/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/55232</b> <b>(43) International Publication Date:</b> 4 November 1999 (04.11.99)
<b>(21) International Application Number:</b> PCT/US99/09030 <b>(22) International Filing Date:</b> 27 April 1999 (27.04.99) <b>(30) Priority Data:</b> 09/066,784      28 April 1998 (28.04.98)      US <b>(71) Applicant:</b> MERCURY DIAGNOSTICS, INC. [US/US]; 4742 Scotts Valley Drive, Scotts Valley, CA 95066 (US). <b>(72) Inventors:</b> ROE, Jeffrey, N.; 3212 Vera Cruz Drive, San Ramon, CA 94583 (US). DOUGLAS, Joel, S.; 25285 La Loma Drive, Los Altos Hills, CA 94022 (US). <b>(74) Agents:</b> SHAMI, Kal et al.; Burns, Doane, Swecker & Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> METHODS AND APPARATUS FOR SUCTIONING AND PUMPING BODY FLUID FROM AN INCISION		
<b>(57) Abstract</b>  A sampling device for sampling body fluid includes a casing which is pressed against a skin surface to produce a seal therewith. A cocking mechanism is pulled rearwardly to place a lancing device in a cocked state. By releasing a trigger, the lancing device is driven forward to produce an incision in the skin, and then is retracted out of the incision. A plunger mounted on the cocking mechanism is then retracted to generate a negative pressure at the front end of the casing to draw body fluid from the incision.		

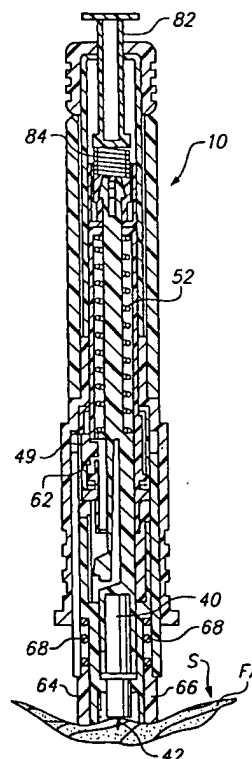

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

## METHODS AND APPARATUS FOR SUCTIONING AND PUMPING BODY FLUID FROM AN INCISION

### Field of the Invention

5 The present invention relates to lancing devices and methods for obtaining samples of blood and other fluids from the body for analysis or processing.

### Background of the Invention

Many medical procedures in use today require a relatively small sample of blood, in the range of 5-50  $\mu$ L. It is more cost effective and less traumatic to the patient to obtain such a sample by lancing or piercing the skin at a selected  
10 location, such as the finger, to enable the collection of 1 or 2 drops of blood, than by using a phlebotomist to draw a tube of venous blood. With the advent of home use tests such as self monitoring of blood glucose, there is a requirement for a simple procedure which can be performed in any setting by a person needing to test.

15 The centuries-old practice of cupping has survived into modern times. Cupping is a treatment in which evacuated glass cups are applied to intact skin in order to draw blood toward or through the surface. The cuppist pierces the skin and uses suction cups to draw out blood. That method was used as a therapeutic procedure for disorders associated with an excess of blood (high blood pressure,  
20 circulation problems and muscular pain), one of the four humors of medieval physiology.

A more recent application for cupping has been the withdrawal of blood from a wound for the purpose of applying the blood to a diagnostic test strip. An instrument employed for that purpose comprises an inverted cup-shaped element

-2-

having a piston. After an incision has been made in the skin by a separate lancet, the piston is depressed, against the bias of a spring, and a rim of the cup-shaped element is applied against the skin in surround relationship to the incision. By then releasing the piston for extension by the spring a vacuum is created around the incision to draw a drop of blood therefrom. Such an instrument is made by  
5 Nipuro Medical Equipment K.K. in Tokyo, Japan.

A shortcoming of such an instrument is the inconvenient need for the user to manipulate two separate pieces of equipment, i.e. the lancet and the suction device.

10 Lancets in conventional use generally have a rigid body and a sterile needle which protrudes from one end. The lancet may be used to pierce the skin, thereby enabling the collection of a blood sample from the opening created. The blood is transferred to a test device or collection device. Blood is most commonly taken from the fingertips, where the supply is generally excellent. However, the nerve  
15 density in this region causes significant pain in many patients. Sampling of alternate site, such as earlobes and limbs, is sometimes practiced to access sites which are less sensitive. These sites are also less likely to provide excellent blood samples and make blood transfer directly to test devices difficult.

Repeated lancing in limited surface areas (such as fingertips) results in  
20 callous formation. This leads to increased difficulty in drawing blood and increased pain.

To reduce the anxiety of piercing the skin and the associated pain, many spring loaded devices have been developed. The following two patents are representative of the devices which were developed in the 1980's for use with  
25 home diagnostic test products.

Cornell et al. U.S. Patent No. 4,503,856 describes a spring loaded lancet injector. The reusable device interfaces with a disposable lancet. The lancet holder may be latched in a retracted position. When the user contacts a release, a

-3-

spring causes the lancet to pierce the skin at high speed and then retract. The speed is important to reduce the pain associated with the puncture.

Levin et al. U.S. Patent No. 4,517,978 describes a blood sampling instrument. This device, which is also spring loaded, uses a standard disposable  
5 lancet. The design enables easy and accurate positioning against a fingertip so the impact site can be readily determined. After the lancet pierces the skin, a bounce back spring retracts the lancet to a safe position within the device.

In institutional settings, it is often desirable to collect the sample from the patient and then introduce the sample to a test device in a controlled fashion.  
10 Some blood glucose monitoring systems, for example, require that the blood sample be applied to a test device which is in contact with a test instrument. In such situations, bringing the finger of a patient directly to the test device poses some risk of contamination from blood of a previous patient. With such systems, particularly in hospital settings, it is common to lance a patient, collect a sample in  
15 a micropipette via capillary action and then deliver the sample from the pipette to the test device.

Haynes U.S. Patent No. 4,920,977 describes a blood collection assembly with lancet and microcollection tube. This device incorporates a lancet and collection container in a single device. The lancing and collection are two separate  
20 activities, but the device is a convenient single disposable unit for situations when sample collection prior to use is desirable. Similar devices are disclosed in Sarrine U.S. Patent No. 4,360,016, and O'Brien U.S. Patent No. 4,924,879.

Jordan et al. U.S. Patents No. 4,850,973 and No. 4,858,607, disclose a combination device which may be alternatively used as a syringe-type injection  
25 device and a lancing device with disposable solid needle lancet, depending on configuration.

Lange et al. U.S. Patent No. 5,318,584 describes a blood lancet device for withdrawing blood for diagnostic purposes. This invention uses a rotary/sliding

-4-

transmission system to reduce the pain of lancing. The puncture depth is easily and precisely adjustable by the user.

It has also been proposed to provide a skin-lancing device with a vacuum-generating device in a single housing, to enable a blood sample to be forcefully  
5 suctioned out of an incision made by the skin-lancing device. Exemplary of such devices are: Garcia et al. U.S. Patent No. 4,637,403; Haber et al. U.S. Patent No. 5,217,480; Suzuki et al. U.S. Patent No. 5,368,047; Dombrowski U.S. Patent No. 4,653,513; and Bodicky et al. U.S. Patent No. 5,320,607. In the Bodicky et al. patent the lancet is fixed to  
10 a suction plunger which can be retracted, along with the lancet, to create a vacuum after the skin has been pierced by the lancet. The need to retract the lancet along with the plunger to create a vacuum complicates the design of the internal structure of the apparatus.

The Suzuki et al. patent discloses a suction plunger which serves not only  
15 as a vacuum generator, but also as an actuator for releasing a cocked lancet for firing.

Erickson et al. U.S. Patent No. 5,582,184, describes a means of collecting and measuring body fluids. This system uses a coaxial hollow lancet and capillary tube disposed within a spacer member. The spacer member limits the depth of  
20 lancet penetration, and compresses body tissue around the lancet while the lancet is in the skin, for improving the flow of interstitial fluid to the incision. However, the incision may tend to close around the lancet, thereby limiting the amount of body fluid that can be obtained.

Single use devices have also been developed for single use tests, i.e. home  
25 cholesterol testing, and for institutional use to eliminate cross-patient contamination multi-patient use. Crossman et al. U.S. Patent No. 4,869,249, and Swierczek U.S. Patent No. 5,402,798, also disclose disposable, single use lancing devices.

-5-

U.S. Patent Nos. 5,421,816; 5,445,611 and 5,458,140 disclose, as a replacement for invasive sampling, the use of ultrasound to act as a pump for expressing interstitial fluid directly through intact (i.e., non-lanced) skin. The amount of fluid which can be obtained by way of such non-invasive vibration is minimal, however.

The disclosures of the above patents are incorporated herein by reference.

Even with the many improvements which have been made, the pain associated with lancing remains a significant issue for many patients. The need for blood sampling and the fear of the associated pain is also a major obstacle for the millions of diagnosed diabetics, who do not adequately monitor their blood glucose due to the pain involved. Moreover, lancing to obtain a blood sample for other diagnostic applications is becoming more commonplace, and a less painful, minimally invasive device is needed to enhance those applications and make those technologies more acceptable.

An object of the present invention therefore, is to provide a device and a method for obtaining a sample of bodily fluid through the skin which is virtually pain free and minimally invasive, particularly by penetrating less sensitive areas of the skin.

Furthermore, known lancing devices include manually actuable buttons for triggering the lance-driving mechanism once the user has placed the device against his/her skin. Because the user knows the precise instant when the lancet will be triggered and pain will be felt, there is a tendency for the user to jerk or raise the device at the instant of triggering, which can lead to inconsistent skin penetration, or possibly no penetration. Therefore, a further object of the invention is to provide a lancing device which eliminates such a tendency on the part of the user.

Therefore, it is another object of the invention to provide a lancet carrier which eliminates the above-mentioned shortcomings.

Another object of this invention is to provide a method which can result in a sample of either blood or interstitial fluid, depending on the sample site and the

-6-

penetration depth utilized. While there are no commercially available devices utilizing interstitial fluid (ISF) at this time, there are active efforts to establish the correlation of analytes, such as glucose, in ISF compared to whole blood. If ISF could be readily obtained and correlation is established, ISF may be preferable as a sample since there is no interference of red blood cells or hematocrit adjustment required.

Another object of this invention is to provide a method which can draw a small but adjustable sample, i.e. 3  $\mu$ L for one test device and 8  $\mu$ L for another test device, as appropriate.

It is a further object of the invention to provide a device for minimally invasive sampling comprising a reusable sampler and disposable sample lancet and collection device.

#### Summary of the Invention

The present invention relates to a sampling device for sampling body fluid. The sampling device comprises a casing defining a longitudinal axis, and a skin-lancing mechanism mounted in the casing for extending a lance through a longitudinal front end of the casing and against a skin surface to form an incision therein, and then retracting the lance back into the housing. A trigger is provided for releasably holding the skin-lancing mechanism in a cocked state. An actuator is provided for moving the trigger to a released position. A plunger is arranged separately from the actuator and is longitudinally rearwardly movable relative to both the skin-lancing mechanism and the actuator, for generating a negative pressure at the front end of the casing to draw body fluid from the incision.

The invention also relates to a method of obtaining a sample of body fluid from a body. The method employs a device comprising a casing, a skin-lancing mechanism and cocking mechanism disposed in the casing, a trigger mounted on the casing for holding the skin lancing mechanism in a cocked state, a plunger mounted on the casing for longitudinal movement relative thereto, a hollow outer



-7-

ring mounted at a front longitudinal end of the casing for longitudinal movement relative thereto, the outer ring including an annular front surface for engaging a skin surface and establishing a seal therewith, and an inner ring situated coaxially within the outer ring and having a front face. The method comprises the steps of:

- 5           A. orienting the skin lancing mechanism in a cocked state;
- B. positioning the front end of the outer ring against a skin surface to form a seal therewith, with the plunger held in a forward position;
- C. displacing the casing forwardly to displace the outer ring rearwardly relative thereto, whereby a rear end of the outer ring releases the skin lancing  
10       mechanism from the cocked state and a spring extends a lance of the skin lancing mechanism forwardly and against the skin surface to form an incision therein and then retracts the lancing mechanism;
- D. longitudinally rearwardly retracting the plunger relative to both the skin lancing mechanism and the outer ring for generating a negative pressure at the  
15       front end of the outer end to draw body fluid from the incision;
- E. displacing the casing forwardly to cause the inner ring to engage the skin surface and express additional body fluid therefrom while breaking the seal between the outer ring and the skin surface;
- F. removing the device from the skin surface;
- 20       G. moving the plunger forwardly; and
- H. repeating steps A, B, D, and E at least once.

#### Brief Description of the Drawing

The objects and advantages of the invention will become apparent from the following detailed description of preferred embodiments thereof in connection with  
25       the accompanying drawing in which like numerals designate like elements and in which:

Fig. 1 is a longitudinal sectional view through a blood sampling device according to a first embodiment of the invention, with the lancet carrier in an unarmed condition;

-8-

Fig. 2 is a view similar to Fig. 1, with the lancet carrier being moved to an armed condition;

Fig. 3 is a view similar to Fig. 2 after a vacuum plunger has been depressed and the lancet carrier has been triggered to cause a lancet to penetrate the skin;

Fig. 4 is a fragmentary view similar to Fig. 1 after an incision has been formed;

Fig. 5 is a view similar to Fig. 4 showing the vacuum plunger being retracted to generate negative pressure at the incision;

Fig. 6 is a view similar to Fig. 5 depicting an inner ring of the casing moving into contact with the skin surface to break a seal between the skin surface and an outer ring of the casing;

Fig. 7 is a longitudinal sectional view taken through a second embodiment of the invention, with a lancet carrier in an armed condition;

Fig. 8 is a view similar to Fig. 7 after the lance carrier has been released and a lance is in the process of forming an incision in a skin surface;

Fig. 9 is a fragmentary view of a front end of the casing as a vacuum plunger is being retracted to form a negative pressure at the incision; and

Fig. 10 is a longitudinal section view of a third embodiment of the invention.

#### Detailed Description of Preferred Embodiments of the Invention

A lancing and suctioning device 10 (see Fig. 1) according to one preferred embodiment of the invention comprises an outer housing 12 having upper and lower portions 14, 16 connected together, and an inner housing 18 fixed to the outer housing.

Mounted for vertical reciprocation in the upper portion 14 of the outer housing 12 is a cocking mechanism 20 comprising a pull handle 22 to which is

-9-

fixedly secured a hollow draw tube 24. Fixed to an inner wall of the draw tube 24 is a draw ring 26.

Situated within the draw tube 24 is a skin-lancing mechanism which includes a draw bar 30 having a pair of flexible hooks 32 at its upper end. The  
5 hooks are releasably latched to a sleeve 34 which is movably disposed within the draw ring 26. A coil compression spring 36 acts between a flange 33 of the sleeve 34 and an inner flange 38 of the draw ring 26.

A trigger sleeve 35 is mounted within the lower portion 16 of the outer housing 12. A lower end of the trigger sleeve rests upon a first outer flange 37A  
10 of the inner housing, and a second outer flange 37B of the inner housing rests upon an inner projection 39 of the trigger sleeve.

At its lower end the draw bar 30 frictionally holds a skin-lancing medium in the form of a disposable lancet 40 in which a needle 42 is disposed. The draw bar 30 includes a flexible latch finger 44 that has a projection 45 adapted to be  
15 received in a hole 46 of the inner housing 18 (see Fig. 2) when the device is armed.

A trigger 49 is mounted in a hole 47 of the trigger sleeve 35 and includes an arm 48 extending partially into the hole 46. The trigger 49 includes an inclined cam follower surface 50.

20 A coil compression spring 52 acts between a top wall 54 of the inner housing 18 and a shoulder 56 of the draw bar.

Slidably disposed within a lower end of the lower portion of the outer housing is an actuator 60 in the form of a firing tube which includes an upper cam surface 62. Fixed to a lower end of the actuator 60 is a cylindrical outer ring 64,  
25 having an end surface 65 of generally frusto-conical shape so as to be oriented at a downward and inward inclination to generally face a longitudinal axis A of the device. The tube 60 can be yieldably mounted within the housing by means of radial detents 60a, enabling the tube 60 to be removed (in order to install a lancet 40) and then snapped back into place.

-10-

Disposed coaxially within the actuator 60 and outer stimulator ring 64 is an inner cylindrical ring 66 having a frusto-conical end surface 67 also oriented at a downward and inward inclination. The ring 66 can be retained in the actuator tube 60 by means of radial detents 66a.

5       The end surfaces 65 and 67 are of circular configuration when viewed along the axis A, other configurations, such as polygonal, oval, etc., are possible.

      The rings 64, 66, together with the housing 12, form a casing.

      A coil compression spring 68 acts between an upper end of the outer stimulator ring 64 and a downwardly facing shoulder 70 of the inner stimulator  
10       ring 66.

      The inner stimulator ring 66 includes a lance stop flange 72 adapted to be engaged by a lance ring 74 of the lancet 40 as will be explained.

      The first flange 37A of the inner housing rests upon a support sleeve 80 which, in turn, rests upon an upper end of the inner stimulator ring 66.

15       A plunger 82 is slidably mounted in the upper end of the pull handle 22 for vertical movement relative thereto. A coil compression spring 84 is mounted in the draw tube 24 and acts between an underside of the plunger 82 and a top side of the sleeve 34 to bias the plunger upwardly. As will be explained, the plunger functions to create a negative pressure within the cylindrical ring 64 when the  
20       plunger moves upwardly while the outer ring 64 is pressed against a user's skin. That is, there is sufficient looseness between the parts of the device to enable a negative pressure created within the draw tube by the plunger 82, to be transmitted to the inside of the outer ring 64.

      In practice, when a fluid sample, such as blood or interstitial fluid, is to be  
25       taken from a user's body, a lancing and suctioning device according to the present invention can be used to minimize pain. To do so, a region of the user's body having less sensitivity than, for example, a fingertip, is selected. Such a low-sensitivity region could be the user's forearm for example. Initially, the handle 22 is pulled up to raise the drawbar 30 until the projection 45 of

-11-

the latch finger 44 snaps into the hole 44 of the inner housing 18, as shown in Fig. 2. Simultaneously, the spring 52 is compressed. Then, the user depresses the plunger 82 against the bias of the spring 84, e.g., by means of a thumb of the user's hand while the remaining fingers grip the housing 12 and press the outer stimulator ring 64 against the user's skin S, e.g., on the selected forearm region FA. Accordingly, the ring 64 and the cam surface 62 of the actuator 60 are moved upwardly to displace the trigger 49 radially inwardly, whereupon the projection 45 of the latch finger 44 is disengaged from the hole 46. Accordingly, the spring 52 expands to displace the drawbar 30 downwardly so that the needle 42 punctures the skin sufficiently deep to cut capillaries in the superficial vascular plexus, as shown in Fig. 3. Simultaneously, the spring 68 is compressed. The extent of displacement of the drawbar 30 is limited by engagement between the lance ring 74 with the lance stop 72.

Once lancing has occurred, the compressed spring 68 expands to raise the drawbar, as well as the needle 42 and inner stimulator ring 66 from the skin (see Fig. 4).

The user then releases the still-depressed plunger 82, whereupon the plunger is driven upwardly by the spring 84 relative to the skin-lancing mechanism 30, 40, the cocking mechanism 20, and the actuator 60 as shown in Fig. 5, to create a negative pressure within the draw tube 24. That negative pressure is transmitted down to the inside of the outer ring 64, due to the looseness between the internal parts of the device. That negative pressure bubbles or puckers the skin, thus opening the incision and forcefully drawing a drop of blood D from the wound, as shown in Fig. 6.

Then, the user can depress the housing 12 toward the user's skin, causing the outer ring 64 to be retracted against the bias of the spring 68, and allowing the end surface 67 of the inner ring 66 to contact and depress the skin away from the end surface 65 of the outer ring 64, expressing more blood from the wound and breaking the seal therebetween. Accordingly, the device can be easily and

-12-

painlessly removed from the user's skin, allowing more blood to flow toward the incision. By repeatedly performing the vacuum and pumping actions over the same incision, the user is able to extract a desired sample amount from the incision.

5           It will thus be appreciated that the present invention enables an ample supply of blood, interstitial fluid or other body fluid to be obtained relatively painlessly from areas of the body which typically possess lesser amounts of such fluid as compared with the highly sensitive fingertip region.

10           A second embodiment of the invention is depicted in Figs. 7-9. Depicted therein is a lancing and suction device 100 which includes a cylindrical casing 102 having a front face 104 for engaging a skin surface 5.

A lancing mechanism mounted in the casing 102 includes a cylindrical sleeve 106 carrying a lancing element 108 at its lower end. Connected to the lancing mechanism is a cocking mechanism which includes a drawbar 110 that is screw threaded to an upper end of the sleeve 106. The drawbar 110 passes through an end wall 112 that is screw threaded in a rear end of the casing 102. A coil compression spring 113 is arranged coaxially within the casing and acts against a forwardly facing surface 114 of the end wall 112 and a rearwardly facing surface 116 of the drawbar 110 to bias the drawbar forwardly.

20           Mounted in the drawbar 110 for longitudinal sliding movement relative thereto is a plunger 120. Affixed to the plunger 120 and projecting forwardly therefrom is a piston rod 122 which terminates forwardly in a piston 124 situated in the sleeve 106.

25           A coil compression spring 126 acts between a forwardly facing surface of the piston rod 122 and a rearwardly facing surface of the drawbar to bias the piston 124 rearwardly relative to the sleeve.

          Mounted on a rear end of the drawbar 110 is a collar 130. A coil compression spring 132 acts between a rearwardly facing surface of the drawbar 110 and a forwardly facing surface of the collar to bias the plunger rearwardly.

-13-

Mounted in the collar 130 for transverse sliding movement relative thereto is a latch 134. The latch is configured to releasably engage a notch 136 formed in the plunger 120 to retain the plunger in a forward position.

A trigger 140 is mounted in the casing 102 and carries a locking pin 142.

5 The trigger is movably transversely relative to the casing and is spring biased inwardly so that the pin 142 can engage a recess formed in the drawbar when the drawbar is in a rearwardly retracted, cocked state.

In operation, the drawbar 110 is retracted rearwardly against the bias of spring 113 until the pin 142 enters the recess therein to retain the drawbar, sleeve  
10 106 and lancing element 108 in a cocked state. The plunger 120 is pushed forwardly against the bias of spring 126 until the latch 134 engages the notch 136 in the plunger to retain the plunger 120 and piston 124 in a forward state.

The front face 104 of the casing 102 is pressed against a skin surface S to form a seal therewith, as shown in Fig. 7. Then, the trigger 140 is pulled out,  
15 enabling the spring 113 to drive the drawbar 110 and lancing element 108 forwardly whereby a needle 150 of the lancing element travels out of the casing to make an incision in the skin surface S as shown in Fig. 8. Then, the now-compressed spring retracts the drawbar and lancing element rearwardly, whereby the needle 150 re-enters the casing.

20 At this point the latch 134 is actuated to release the plunger 120 which is driven rearwardly by the spring 126. The piston 124 is also driven rearwardly to produce a negative pressure at the front end of the casing to draw a drop D of body fluid from the incision, as shown in Fig. 9. By then moving the plunger 120 forwardly, the suction is broken to enable the casing to be separated from the skin  
25 surface. The drop D of body fluid can then be sampled.

Another embodiment of the invention is depicted in Fig. 10. That embodiment is similar to the one disclosed in connection with Figs. 1-6, except that no cocking handle 22 is provided. Rather, cocking occurs during insertion of the lancet 40.

-14-

The same reference numerals used in Fig. 1 will be used in Fig. 10 to designate the same parts. When the actuator tube 60 is removed, the lower end of the draw bar 30 is exposed for accommodating the removal and/or insertion of a lancet 40. During the insertion of the lancet, a rearward force is applied thereto in  
5 order to displace the draw bar 30 sufficiently rearwardly to enable the projection 45 of the latch finger 44 to enter the hole 47, and thus be held therein in a cocked state. This eliminates the need for a separate cocking handle 22.

Before an incision is made, the plunger 82 is pushed forwardly. After the incision has been made (i.e., by causing the actuator 60 to move rearwardly and  
10 actuate the trigger 49), the plunger 82 is released, whereupon the spring 84 displaces the plunger rearwardly to create a negative pressure in the draw tube 24 which is transmitted forwardly to the inside of the outer ring 64 as described earlier in connection with Fig. 1.

Although the present invention has been described in connection with  
15 preferred embodiments thereof, it will be appreciated by those skilled in the art that additions, deletions, modifications, and substitutions not specifically described may be made without departing from the spirit and scope of the invention as defined in the appended claims.



-15-

Claims:

1. A sampling device for sampling body fluid, comprising:  
  
a casing defining a longitudinal axis;  
  
a skin-lancing mechanism for extending a lance through a longitudinal front  
5 end of the casing and against a skin surface to form an incision therein, and  
then retracting the lance back into the housing;  
  
a trigger for releasably holding the skin-lancing mechanism from in a  
cocked state;  
  
an actuator for displacing the trigger to a release position for releasing the  
10 skin-lancing mechanism; and  
  
a plunger arranged separated from the actuator and being longitudinally  
rearwardly movable relative to both the skin-lancing mechanism and the  
actuator for generating a negative pressure at the front end of the casing to  
draw body fluid from the incision.
- 15 2. The sampling device according to claim 1 further including a  
cocking mechanism connected to the skin-lancing mechanism and being  
longitudinally movable relative to the housing for positioning the skin-lancing  
mechanism in a cocked state, the plunger being longitudinally rearwardly movable  
relative to the cocking mechanism.
- 20 3. The sampling device according to claim 1 wherein the plunger is  
spring biased in a direction away from the front end of the casing.

-16-

4. The sampling device according to claim 1 wherein the casing includes a housing and a hollow ring member mounted at a front end of the housing for longitudinal movement relative thereto, the ring member including an annular front surface for engaging a skin surface and establishing a seal therewith,  
5 the ring member including a rear end arranged to trip the trigger in response to rearward movement of the ring member relative to the housing.

5. The sampling device according to claim 4 wherein the ring member constitutes a radially outer ring, the casing further including a radially inner ring situated coaxially with the outer ring and having a front face arranged to engage a  
10 skin surface in response to rearward movement of the outer ring relative to the housing, for increasing blood expression from the wound and breaking the sealing engagement between the skin surface and the front end face of the outer ring.

6. A method of obtaining a sample of body fluid from a body, the method employing a device comprising a casing, a skin-lancing mechanism and  
15 cocking mechanism disposed in the casing, a trigger mounted on the casing for holding the skin-lancing mechanism in a cocked state, a plunger mounted on the casing for longitudinal movement relative thereto, a hollow outer ring mounted at a front longitudinal end of the casing for longitudinal movement relative thereto, the outer ring including an annular front surface for engaging a skin surface and  
20 establishing a seal therewith, and an inner ring situated coaxially within the outer ring and having a front face; the method comprising the steps of:

- A) orienting the skin-lancing mechanism in a cocked state;
- B) positioning the front end of the outer ring against a skin surface to form a seal therewith, with the plunger held in a forward position;
- 25 C) displacing the casing forwardly to displace the outer ring rearwardly relative thereto, whereby a rear end of the outer ring releases the skin-lancing mechanism from the cocked state, and a spring extends a lance of the released

-17-

skin-lancing mechanism forwardly and against the skin surface to form an incision therein, and then retracts the lancing mechanism;

5 D) longitudinally rearwardly retracting the plunger relative to both the skin-lancing mechanism and the outer ring for generating a negative pressure at the front end of the outer ring to draw body fluid from the incision;

E) displacing the casing forwardly to cause the inner ring to engage the skin surface and express additional body fluid therefrom while breaking the seal between the outer ring and the skin surface;

F) removing the device from the skin surface;

10 G) moving the plunger forwardly; and

H) repeating steps A, B, D, and E at least once to increase the quantity of expressed body fluid.

1/4

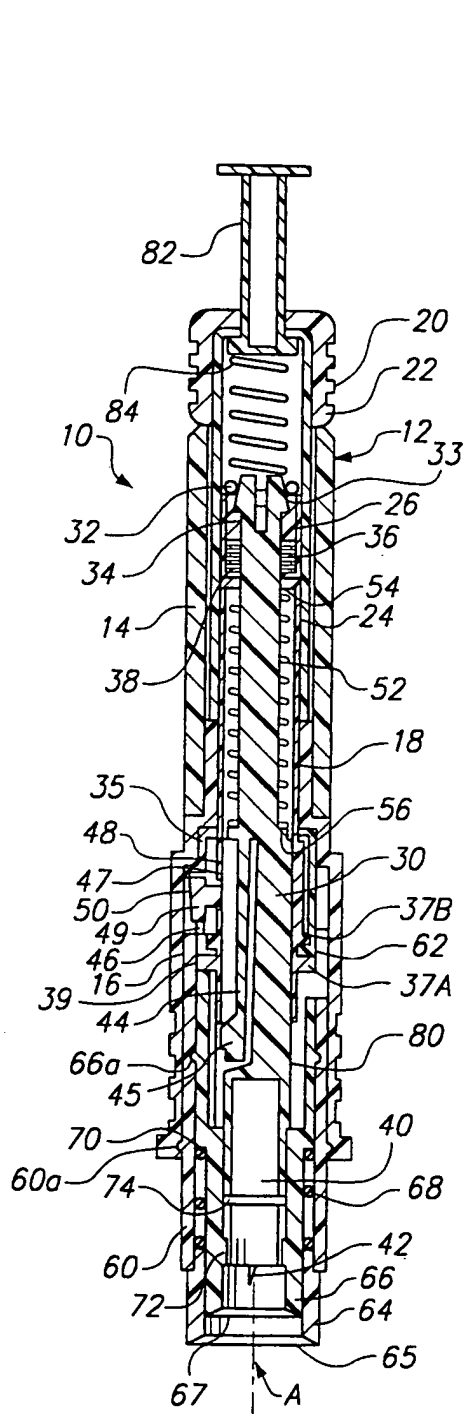


FIG. 1



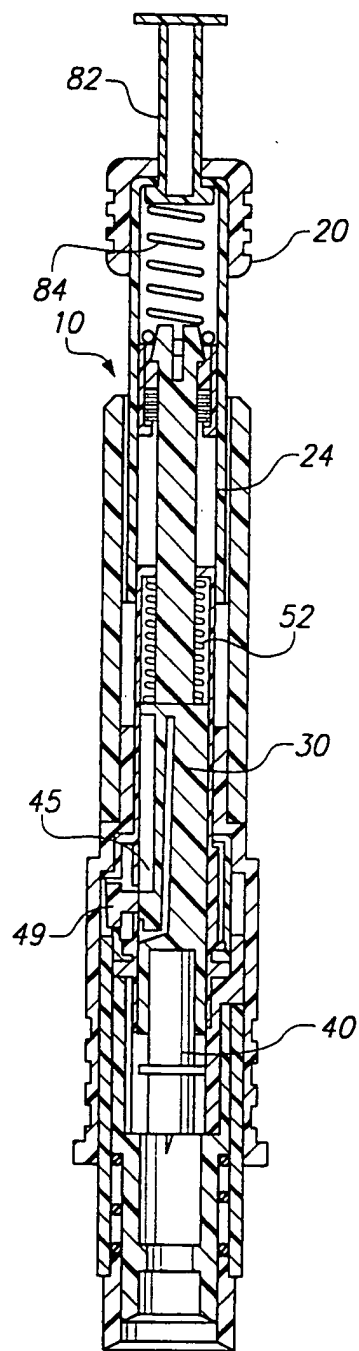


FIG. 2


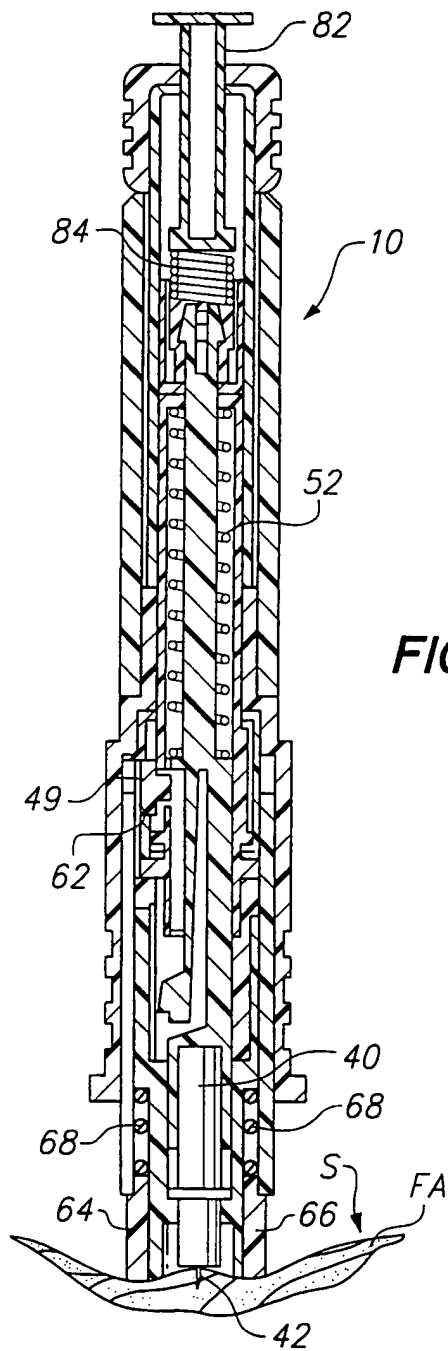


**FIG. 3**

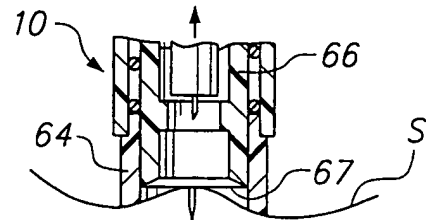


**FIG. 4**

**FIG. 5**

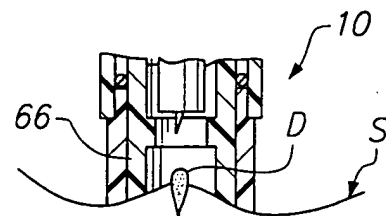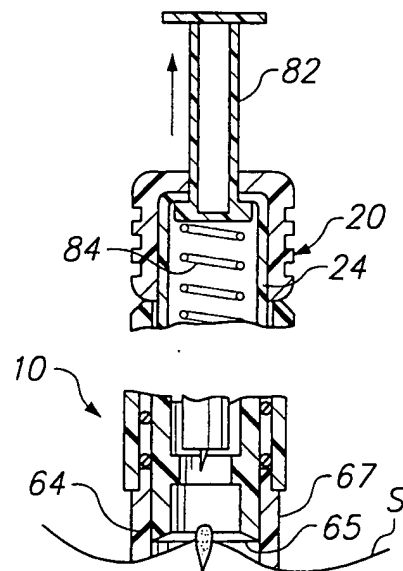


**FIG. 6**


3/4

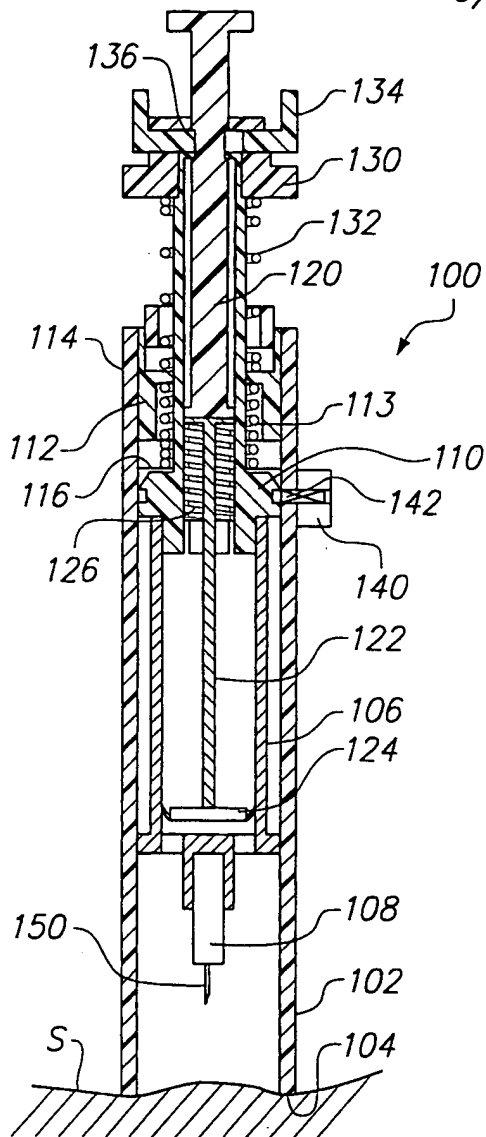


**FIG. 7**

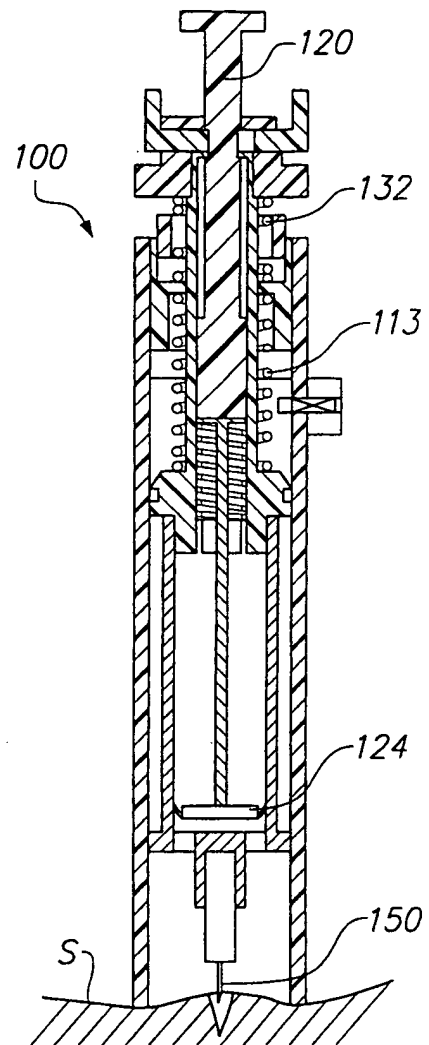

**FIG. 8**

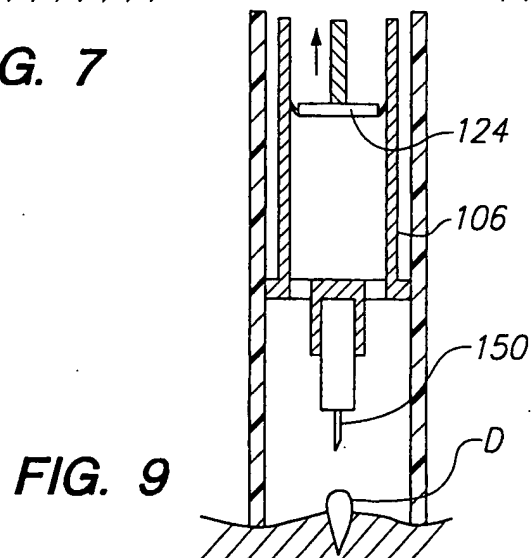

**FIG. 9**

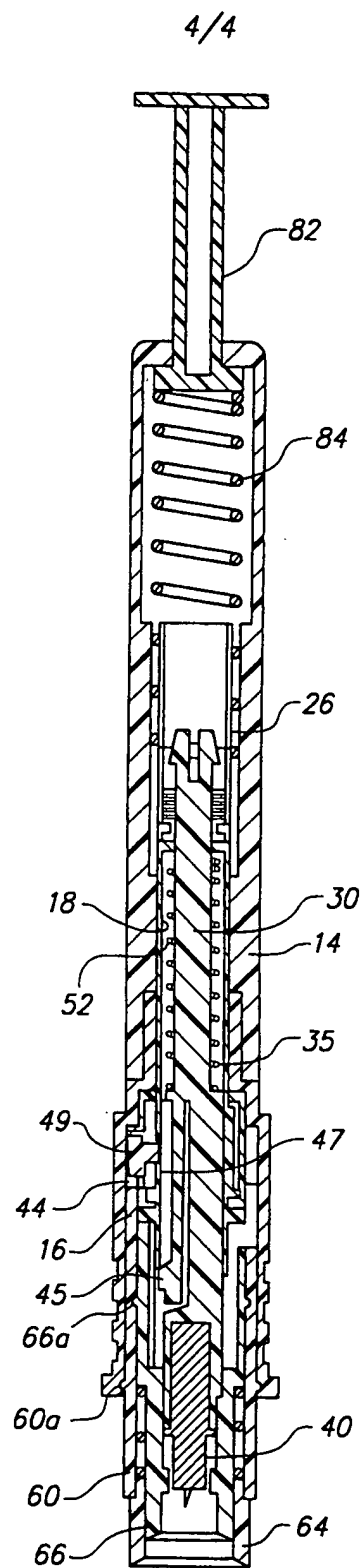

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/09030

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61B5/14 A61B10/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 97 43962 A (MERCURY DIAGNOSTICS INC) 27 November 1997 (1997-11-27) page 10, line 1 - page 13, line 10; claims; figures 1-6 ---	1-5
Y	EP 0 622 046 A (NISSHO KK) 2 November 1994 (1994-11-02) column 7, line 1 - column 8, line 10; claims; figures 1-7 ---	1-5
A	WO 97 42885 A (MERCURY DIAGNOSTICS INC) 20 November 1997 (1997-11-20) page 8, line 25 - page 9, line 35 page 10, line 32 - page 12, line 26; figures 1-3 --- -/-	1-5

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 July 1999

Date of mailing of the international search report

30/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Manschot, J



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 99/09030

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 666 966 A (HORIE MASAO ET AL) 16 September 1997 (1997-09-16) page 3, line 35 - page 6, line 45; figures	1-3
A	EP 0 212 906 A (DOMBROWSKI MITCHELL P) 4 March 1987 (1987-03-04) page 12, line 1 - page 17, line 20; figure 3	1-4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 99/ 09030

### Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 6  
because they relate to subject matter not required to be searched by this Authority, namely:  
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

#### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int lional Application No

PCT/US 99/09030

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9743962 A	27-11-1997	AU 3070397 A	05-12-1997
		AU 3131097 A	05-12-1997
		AU 3206797 A	09-12-1997
		AU 3207197 A	05-12-1997
		AU 3284797 A	05-12-1997
		AU 3368297 A	05-12-1997
		DE 19781044 T	03-12-1998
		DE 19781046 T	24-12-1998
		DE 19781097 T	01-07-1999
		DE 19781098 T	24-12-1998
		DE 29723357 U	15-10-1998
		DE 29723371 U	06-08-1998
		EP 0904022 A	31-03-1999
		EP 0906062 A	07-04-1999
		GB 2322561 A	02-09-1998
		GB 2323792 A	07-10-1998
		GB 2322562 A	02-09-1998
		GB 2325167 A	18-11-1998
		WO 9742882 A	20-11-1997
		WO 9742883 A	20-11-1997
		WO 9742885 A	20-11-1997
		WO 9742886 A	20-11-1997
		WO 9742888 A	20-11-1997
		US 5857983 A	12-01-1999
EP 0622046 A	02-11-1994	JP 2630197 B	16-07-1997
		JP 6311980 A	08-11-1994
		US 5368047 A	29-11-1994
WO 9742885 A	20-11-1997	AU 3070397 A	05-12-1997
		AU 3131097 A	05-12-1997
		AU 3206797 A	09-12-1997
		AU 3207197 A	05-12-1997
		AU 3284797 A	05-12-1997
		AU 3368297 A	05-12-1997
		DE 19781044 T	03-12-1998
		DE 19781046 T	24-12-1998
		DE 19781097 T	01-07-1999
		DE 19781098 T	24-12-1998
		DE 29723357 U	15-10-1998
		DE 29723371 U	06-08-1998
		EP 0904022 A	31-03-1999
		EP 0906062 A	07-04-1999
		GB 2322561 A	02-09-1998
		GB 2323792 A	07-10-1998
		GB 2322562 A	02-09-1998
		GB 2325167 A	18-11-1998
		WO 9743962 A	27-11-1997
		WO 9742882 A	20-11-1997
		WO 9742883 A	20-11-1997
		WO 9742886 A	20-11-1997
		WO 9742888 A	20-11-1997
		US 5857983 A	12-01-1999
US 5666966 A	16-09-1997	JP 2723048 B	09-03-1998
		JP 8000598 A	09-01-1996
EP 0212906 A	04-03-1987	US 4653513 A	31-03-1987

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/09030

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0212906 A		AU 575257 B	21-07-1988
		AU 6069686 A	19-02-1987
		JP 62038140 A	19-02-1987
<hr/>			